



## R型连带圆形裸端子

### 系列：R型

产品材质:接线端子采用优质紫铜制成,导电性良好。

产品特点:采用优质亚光电镀,防锈时间大大加长,无锋利部位;配套日成端子钳即可压紧电线,接线美观,

国际认证:欧盟RoHS环保认证。


产品特性:品质优良,压紧后不断裂松开,-40度耐热至150度正常使用。

使用方法:将电线剥开外皮,穿入端子后铜管

连带端子 连带接线端子 冷压接线端子



## 产品规格

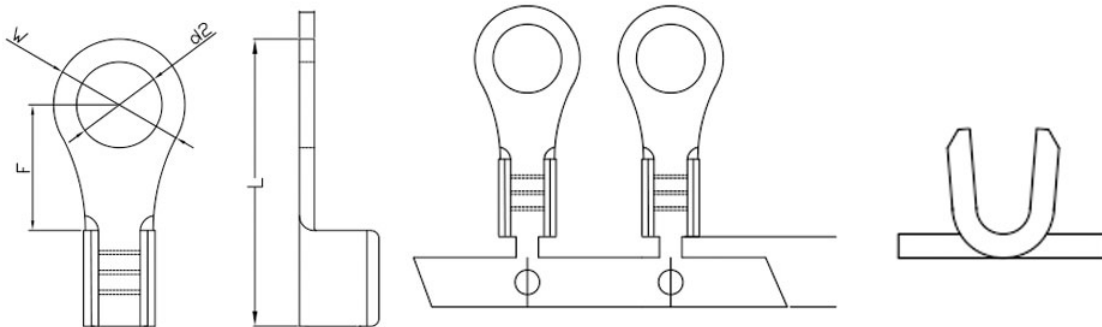

型号 Item No.	螺栓规格	螺栓直径	尺寸 DIMENSION ( mm )		
	USA screw	D2	W	F	L
R1.25-3连带	#4	3.2	5.7	4.95	12.6
RS1.25-3.5连带	#6	3.7	5.7	4.95	12.6
RM1.25-3.5连带	#6	3.7	6.6	6.3	14.4
RL1.25-3.5连带	#6	3.7	8.0	7	15.8
RS1.25-4连带	#8	4.3	6.6	6.3	14.4
RL1.25-4连带	#8	4.3	8.0	7	15.8
RS1.25-5连带	#10	5.3	8.0	7	15.8
RL1 25-5连带	#10	5.3	9.8	8.5	18
RS1.25-6连带	1/4	6.4	9.8	8.5	18
RL1.25-6连带	1/4	6.4	11.6	11.1	21.8
R1.25-8连带	5/16	8.4	11.6	11.1	21.8
R1.25-10连带	3/18	10.5	13.6	13.9	25.5
R2-3连带	#4	3.2	6.6	4.3	12.3
RS2-3.5连带	#6	3.7	6.6	4.3	12.3
RM2-3.5连带	#6	3.7	6.6	7	16
RL2-3.5连带	#6	3.7	8.5	7.75	16.8
RS2-4连带	#8	4.3	6.6	7	16
RL2-4连带	#8	4.3	8.5	7.75	16.8
RS2-5连带	#10	5.3	8.5	7.75	16.8
RL2-5连带	#10	5.3	9.5	7.25	16.8

RL2-6连带	1/4	6.4	12.0	11	21.8
R2-8连带	5/16	8.4	12.0	11	21.8
R2-10连带	3/8	10.5	14.6	13.9	26
R3.5-4连带	#8	4.3	8.0	7.7	18
RS3.5-5连带	#10	5.3	8.0	7.7	18
RL3.5-5连带	#10	5.3	12.0	7.7	21.4
R3.5-6连带	1/4	6.4	12.0	7.7	21.4
R3.5-8连带	5/16	8.4	15.0	14	27.5
R3.5-10连带	3/8	10.5	15.0	14	27.5
R5.5-3.5连带	#6	3.7	7.2	5.9	15.7
RS5.5-4连带	#8	4.3	7.2	8.3	19.8
RL5.5-4连带	#8	4.3	9.5	8.3	19.8
R5.5-5连带	#10	5.3	9.5	13	25.8
R5.5-6连带	1/4	6.4	12.0	13.7	28.0
R5.5-8连带	5/16	8.4	15.0	13.7	28.0
R5.5-10连带	3/8	10.5	15.0	16	32.4

## 图片介绍

